

GEAR TOOTH PITCH GAUGES






4860-245




- Check the module pitch of gear tooth
- Accuracy: ±0.05mm
- Made of hardened stainless steel

Code	Range	Pressure angle	Quantity of leaves
4860-145	0.35-4.5mm	14.5°	15
4860-245	0.35-4.5mm	20°	15
4860-112	5-12mm	14.5°	8
4860-212	5-12mm	20°	8

CENTER GAUGES



- huntuuluun
- To check and set screw cutting tools, and check the angle and pitch of screw thread
- Angle accuracy: ±30min.
- Made of stainless steel

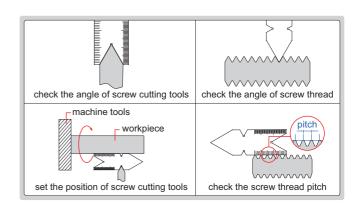


Code	Thread type	Angle (α)	Graduation
4810-601	METRIC 60°	60°	0.5mm and 1mm
4810-602	UNIFIED 60°	60°	14ths and 20ths on front side, 24ths and 32ths on back side
4810-55	WHITWORTH 55°	55°	14ths and 20ths on front side. 24ths and 32ths on back side


THREAD GAUGES



4812-E



- To check and set screw cutting tools
- Made of medium carbon steel

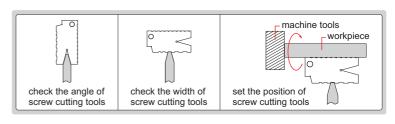

Code	Range	Thread type	Pitch
4812-12	2-12mm	Tr 30°	2, 3, 4, 5, 6, 7, 8, 9, 10, 12mm
4812-E	1-10TPI	ACME 29°	1, 1-1/3, 1-1/2, 1-3/4, 2, 2-1/2, 3, 4, 5, 6, 7, 8, 9, 10TPI